

# DRAIN CLEANER



**NEW  
ROOTS AND  
SAND NOZZLE**




**TYPE-MD 50**




Regular and proper maintenance of land drainage systems is a must in order to keep the soil in good condition therefore increasing yields and maximising profit.

To achieve this you must use the correct drain-cleaning machine designed and built on years of experience.

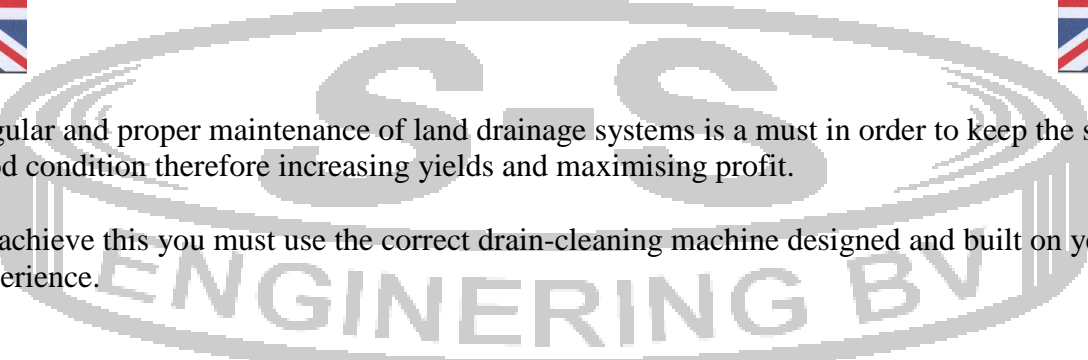

The S-S Engineering Drain cleaner has a number of good advantages, it is brilliant for drains up to 200 metres long and 200 mm diameter. The high pressure pump has an out put of 50 bar and a working pressure of  $\pm 15$  bar and 120 litre/minute flow at the nozzle head. The high-speed water coming out of the adjustable nozzle through the rear facing holes drives the hose up the drainpipe. At the same time this back flow of high-speed water flushes the sediment from the drain.

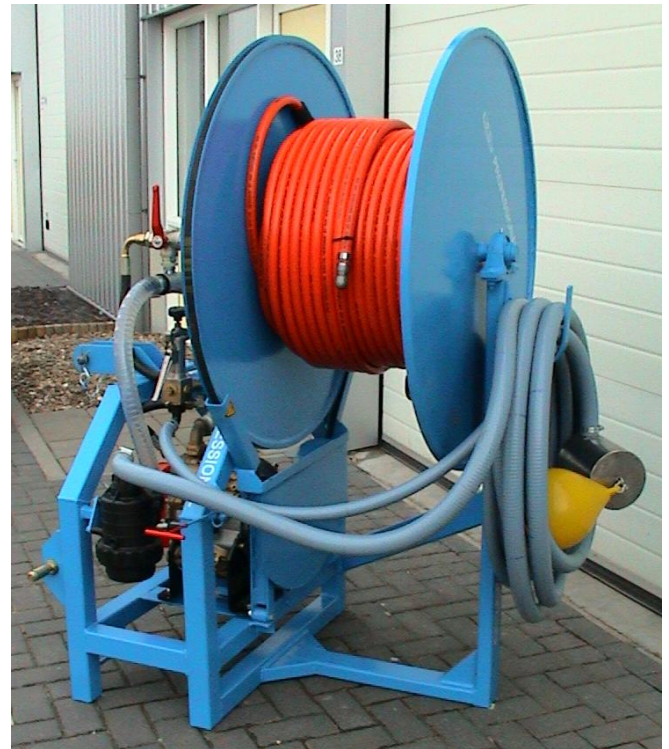

The hose has been specially developed and manufactured for this machine with a pressure rating of 80 bar lengths of 100, 150 and 200 metres can be supplied on the reel. The retrieval of the hose from the drain is a VEE belt system driven off the water pump.



**Technical details**

High pressure pump	200 litre/minute 50 bar pressure
Special Hose	80 bar rated, length 100 metres standard Options 150 and 200 metres
Suction Hose	10 metres with filter and float
Bypass Hose	6 metres 1"
Pressure Regulator	Standard
Large pump filter	Standard
Reel Recoil	VEE belt drive



Dimensions:	Height	1.70 Mtrs
	Width	1.00 Mtrs
	Length	0.90 Mtrs
	Weight	250 Kg



**NEW  
ROOTS AND  
SAND NOZZLE**



**S – S Engineering BV** Tel. 0031-58 - 257 18 33  
**Tulipastrjitte 38** Fax. 0031-58 - 257 58 47  
**9051 NG STIENS** Mobil 0031-6 – 54 20 20 54  
**THE NETHERLANDS** www.drain-cleaner.nl

**Dealer :**

S-S Engineering reserve the right to change the specification without notice